


RESOURCE GUIDE - MOUNTING FIXTURES - FLEXIBLE - WURM-DW



MOUNTING NOTE: 2 clips provided per first 12", 1 clip provided per additional foot

WHITE SNUG CLIP SMALL

- For indoor/outdoor use
- Surface mounting
- Stainless Steel/Corrosion resistant
- Discrete mounting
- White glossy finish




MOUNTING HARDWARE

- #6 - 5/8" (one provided for each clip)
- 832 Silicone (sold separately)

MAGNETIC CLIP SMALL

- For indoor/outdoor use
- Steel clip
- Neodymium magnet
- Easy install
- Easily detachable
- COVE USE ONLY
- White glossy finish



MOUNTING HARDWARE

- #6 - 1 1/4" (one provided for each clip)
- 832 Silicone (sold separately)


RESOURCE GUIDE - LINEAR FIXTURES - FLEXIBLE - WURM-DW



RATED

DRY

- Lengths up to 191"
- Encapsulated in Polyurethane
- NOT FIELD CUTTABLE

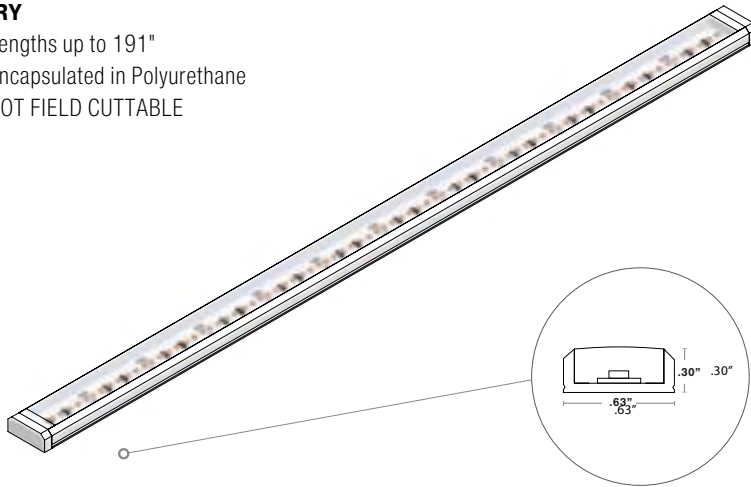


COMPATIBLE CONNECTORS

Bare Wire (BW) 24"



WET

- Lengths up to 191"
- Encapsulated in Polyurethane
- NOT FIELD CUTTABLE

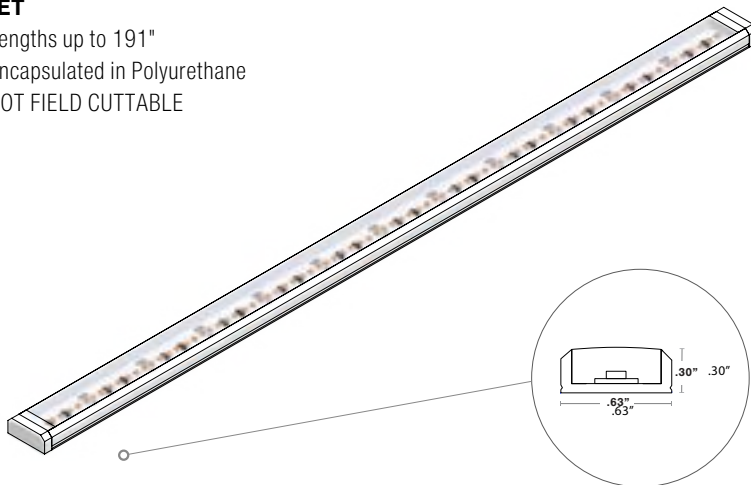

COMPATIBLE CONNECTORS

Bare Wire (BW) 24"



RESOURCE GUIDE - COLOR DATA




FIXTURES - FLEXIBLE - WURM-DW-DRY



2400K

2318 K

CRI: 91.7
 CRI R9: 62.3
 TM30 Rf: 87.7
 TM30 Rg: 103.3
 CQS: 84.6
 X: 0.493
 Y: 0.413
 U: 0.283
 V: 0.356
 Δuv: -0.0007






R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15	
92.6	94.7	94.0	92.4	91.2	93.6	92.4	82.7	62.3	85.6	92.7	81.0	93.0	95.1	89.0	
Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15	
81.9	91.8	83.1	84.2	85.2	81.1	78.5	83.7	93.1	87.4	87.4	87.5	88.4	84.4	82.9	
C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
89.7	89.3	80.4	86.5	88.7	86.7	84.8	88.4	91.3	90.2	87.5	86.0	89.0	84.0	89.0	86.5

TM30			
Hue Bin	Rr	Chroma	Hue
1	90	-4%	-1%
2	89	-4%	4%
3	80	0%	9%
4	86	4%	7%
5	89	7%	6%
6	87	9%	0%
7	85	4%	-8%
8	88	0%	-7%
9	91	-3%	-3%
10	90	-4%	3%
11	88	0%	7%
12	86	3%	6%
13	89	6%	-5%
14	84	6%	-8%
15	89	2%	-7%
16	86	-2%	-9%

3000K

2999 K

CRI: 95.8
 CRI R9: 89.4
 TM30 Rf: 92.3
 TM30 Rg: 102.1
 CQS: 92.4
 X: 0.436
 Y: 0.401
 U: 0.251
 V: 0.347
 Δuv: -0.0010






R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15	
97.2	96.5	93.3	96.2	95.7	94.0	97.5	96.1	89.4	89.8	95.5	79.2	96.9	95.3	97.1	
Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15	
95.8	97.7	86.6	87.8	92.2	92.0	89.6	93.6	95.6	92.9	93.1	94.4	95.8	95.5	95.3	
C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
95.5	95.8	90.9	93.3	92.3	93.9	94.3	96.3	95.2	89.0	85.8	88.1	94.6	91.2	92.8	88.4

TM30			
Hue Bin	Rr	Chroma	Hue
1	96	-2%	-1%
2	96	-1%	1%
3	91	0%	4%
4	93	0%	3%
5	92	0%	3%
6	94	3%	0%
7	94	0%	-1%
8	96	-1%	-2%
9	95	-2%	1%
10	89	-2%	6%
11	86	1%	10%
12	88	4%	5%
13	95	3%	0%
14	91	6%	-2%
15	93	2%	-3%
16	88	3%	-8%

2400K-3000K

2614 K

CRI: 94.7
 CRI R9: 78.0
 TM30 Rf: 90.8
 TM30 Rg: 103.1
 CQS: 89.8
 X: 0.464
 Y: 0.406
 U: 0.267
 V: 0.351
 Δuv: -0.0020



R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15	
96.3	96.7	94.3	95.1	95.1	95.2	95.1	90.3	78.0	90.1	95.0	82.8	96.4	95.6	94.4	
Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15	
90.5	95.9	85.8	87.1	90.9	88.6	84.8	89.3	95.7	91.0	90.9	91.4	92.6	91.4	90.7	
C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
93.5	93.6	87.2	90.6	92.1	90.4	91.0	93.1	95.4	90.9	85.6	88.3	92.1	89.0	92.3	86.9

TM30			
Hue Bin	Rr	Chroma	Hue
1	94	-3%	-1%
2	94	-2%	2%
3	87	0%	6%
4	91	1%	4%
5	92	4%	4%
6	90	6%	0%
7	91	3%	-4%
8	93	0%	-4%
9	95	-2%	-1%
10	91	-2%	5%
11	86	1%	9%
12	88	4%	4%
13	92	5%	-2%
14	89	6%	-5%
15	92	1%	-4%
16	87	1%	-9%

NOTES:

- CRI R values, only R1-R8 are used to calculate RA CRI values
- TM30 C values, 16 binned values out of total of 99 C values
- CQS Q values
- Data subject to change, all data has +/- 5% tolerance

RESOURCE GUIDE - FLEXIBLE FIXTURES

FIXTURES - FLEXIBLE - WURM-DW




LENS



ENC/CL Encapsulated in Clear

ENC/TL Encapsulated in Translucent

LIGHT ORIENTATION




SYMMETRICAL

CONNECTORS

Bare Wire (BW) 24"




TYPE



.13" added at end

S1 - Input only



P1 - Input/Output




RESOURCE GUIDE - CONNECTORS/WIRE FIXTURES - FLEXIBLE - WURM-DW



CONNECTORS/WIRE

BARE WIRE

- Belden Wire
- Outdoor rated
- 24" Standard length

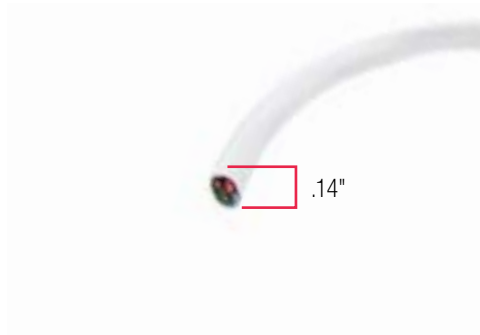

RELATED PRODUCTS

Q-mini-J*

Sold: Individually



Junction Box that allows for splicing of LED Lead wires

*Full ordering guide available for this product