

TRE3

EXTRUSIONS ALUMINUM (iQA)




PRODUCT	FINISH	MOUNTING	LENS	TYPE	FINISHED FIXTURE LENGTH (IN)
TRE3	ST	HSS TBC	DF	S1 S2 P1 P2	1" increments from 1" - 98.43" Tolerance +0.0"/+0.5"
	ST		DF	Single (Closed exit) Pass through	

- NOTES:**
- UL Listed when assembled with STRIP LEDs at Q-Tran
 - NRTL Listed for install in Storage Areas with Clothing, NEC Field 410.2 and 410.16 when assembled as a fixture, with 4.0 w/ft or less, at Q-Tran facility
 - Field modifications must comply with Q-Tran's installation methods otherwise warranty is null and void

FINISH




MOUNTING



Hidden Stainless Steel

NOTE: 2 clips provided for 4' or less;
4 clips provided for greater than 4'




Plastic T-Bar

NOTE: Standard 1"(15/16) grid Clips
: 2 clips provided per first 12",
1 clip provided per additional foot

LENS with LED visibility



DIMENSIONS

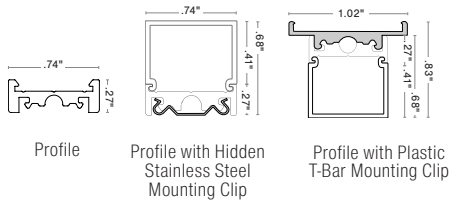


END CAPS




TYPE


SINGLE (Input only)




PASS THROUGH (Input/Output)



ORDER EXAMPLE



LENGTH (IN)

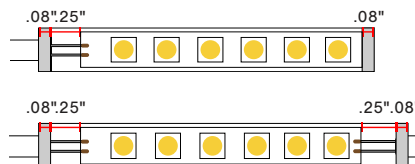

Endcap#1
Endcap#2
Space to solder wire

S1 .08" + .08" + .25" = .41"

P1 .08" + .08" + 2x(.25") = .66"

PROJECT NAME	DATE	COMPANY	TYPE	NOTE