# TRE3

## EXTRUSIONS ALUMINUM (iQA)

c UL us LISTED | RoHS COMPLIANT | NEC 410.2 and 410.16

| PRODUCT | FINISH | MOUNTING | LENS | TYPE | FINISHED FIXTURE LENGTH (IN) |
|---|---|---|---|---|---|
| TRE3 | ST | | DF | | |
| | ST | HSS<br>TBC | DF | S1<br>S2 — Single (Closed exit)<br>P1<br>P2 — Pass through<br>NI — Not installed (Strip not installed in factory) | 1" increments from 1" - 98.43"<br>Tolerance +0.0"/+0.5" |

**NOTES:**
- UL Listed when assembled with STRIP LEDs at Q-Tran
- NRTL Listed for install in Storage Areas with Clothing, NEC Field 410.2 and 410.16 when assembled as a fixture, with 4.0 w/ft or less, at Q-Tran facility (Not applicable for encapsulation)
- Field modifications must comply with Q-Tran's installation methods otherwise warranty is null and void

### FINISH

ST

Satin

### MOUNTING

TRE3-HSS

QTY:




Hidden Stainless Steel

NOTE: 2 clips provided for 4' or less;
4 clips provided for greater than 4'

TRE3-TBC

QTY:




Plastic T-Bar

NOTE: Standard 1"(15/16) grid Clips
: 2 clips provided per first 12",
1 clip provided per additional foot

### LENS

DF



Diffused

### DIMENSIONS




Profile




Profile with Hidden Stainless Steel Mounting Clip




Profile with Plastic T-Bar Mounting Clip

### TYPE

SINGLE (Input only)

S1 | S2



PASS THROUGH (Input/Output)

P1 | P2



ORDER EXAMPLE




### END CAPS

QTY:




Endcap

### WIRE WAY




### LENGTH (IN)

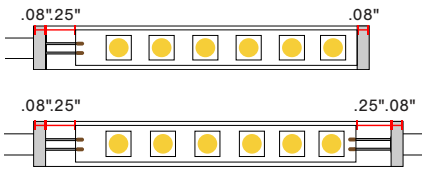





| PROJECT NAME | DATE | COMPANY | TYPE | NOTE |
|---|---|---|---|---|
| | | | | |

© 2019 Q-Tran Inc. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@q-tran.com | www.q-tran.com | Specification subject to change | Rev-06-28-19